

Hunter®

NEW



JACK OF ALL SPRAYS

Residential or commercial? 2.1 bar or 2.8 bar? High efficiency or high performance? There's a Pro-Spray for that. Now expanded to three hard-working options, the Pro-Spray line offers everything you need for total customization for any challenging site. Need precision edges? Go for the Pro-Spray Fixed Arc nozzles. Demanding angles and curves? Choose the Pro Adjustable nozzles. Conservation-minded client? The MP Rotator is your answer. All models boast heavy-duty ABS construction, including an extra-thick body and cap, and exclusive body ribs for easier installation, service, and stability in loose soils. The sprinkler also features a user-friendly "pull-ring" flush cap to keep debris to a minimum and a multi-function wiper seal that eliminates flow-by.



PRO-SPRAY®

Ready for commercial or residential projects, the Pro-Spray is a rugged and reliable sprinkler for versatile applications. The contractor's choice for years, it was designed with the professional in mind.

Features and Benefits

- 01 Ratcheting riser for quick arc alignment**
Make adjustments while sprinkler is operating
- 02 Heavy-duty body and cap construction**
Withstands the harshest environments with multi-thread buttress design
- 03 Pressure-activated, multi-function, no flow-by wiper seal**
Permits easy removal and cleaning; treated with UV inhibitors to ensure long life
- 04 Compatible with all female threaded nozzles**
Accepts adjustable, fixed, and specialty nozzles from Hunter and all major brands
- 05 Heavy-duty spring**
Ensures positive retraction under any conditions
- 06 Optional factory-installed drain check valve for up to 10 feet elevation change**
Eliminates landscape damage from flooding and erosion
- 07 Innovative pop-top flush plug design**
Allows limited flow permitting controlled directional flushing

WORKS BEST WITH



PRO-SPRAY FIXED
ARC NOZZLES



PRO ADJUSTABLE
NOZZLES



MP ROTATOR

POP-UP HEIGHTS

Shrub	10 cm
5 cm	15 cm
7.5 cm	30 cm




5 YEAR
WARRANTY

PRS30

Designed for commercial spray systems, the PRS30 boasts an in-stem 2.1 bar regulator, providing optimal pressure to reduce water waste. Other features include a factory-installed check valve and the most powerful retraction spring in its class.

PRESSURE
REGULATED AT
2.1
BAR

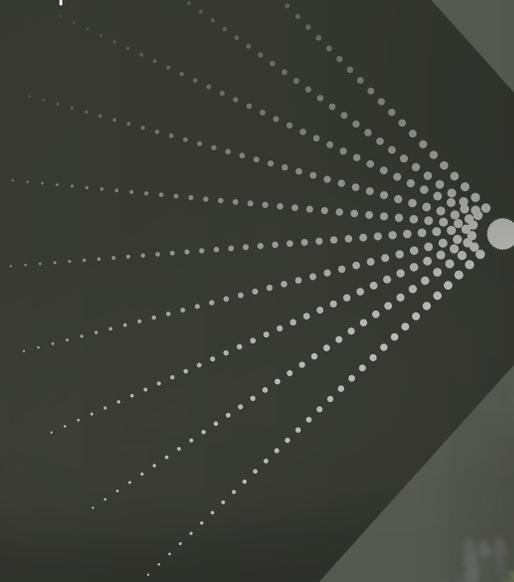

PRO-SPRAY FIXED
ARC NOZZLES



PRO ADJUSTABLE
NOZZLES

POP-UP HEIGHTS


Shrub	15 cm
10 cm	30 cm



PRS40

Calibrated at a consistent 2.8 bar, the PRS40 is designed for optimal performance when combined with the revolutionary MP Rotator. To maximize water efficiency at any site, the PRS40 and MP Rotator are a partnership that performs.

PRESSURE
REGULATED AT
2.8
BAR

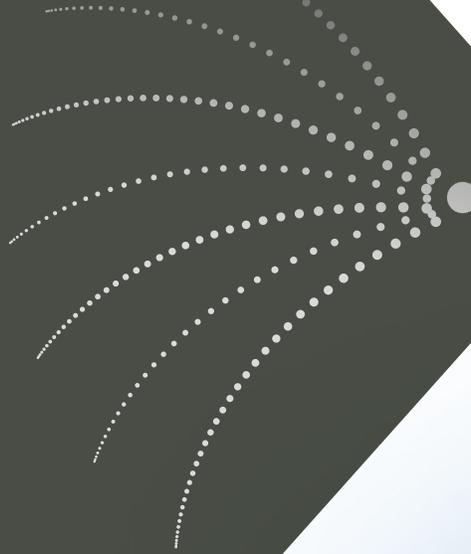

MP ROTATOR

POP-UP HEIGHTS

Shrub	15 cm
10 cm	30 cm

Pro-Spray and MP Rotator

Retrofit a system with MPs, and see water use reduced by 30 percent on average. Design a completely new system with them and realize even greater savings, all while grass stays green and landscapes look better than ever.

Around the world, cities and municipalities are recognizing the MP as not only a high performance sprinkler, but as a water conservation device, for beautiful, eco-minded landscapes.



Charts and Specs

STANDARD MODELS	OPTIONS
PROS-00 = Shrub adapter	(blank) = No option CV = Factory-installed drain check valve (pop-up models only) CV-R = Factory-installed reclaimed body cap (shrub molded in purple) 15 cm and 30 cm models ordered as CV will come as no side inlet
PROS-02 = 5 cm (2") pop-up	
PROS-03 = 7.5 cm (3") pop-up	
PROS-04 = 10 cm (4") pop-up	
PROS-06 = 15 cm (6") pop-up	
PROS-06-NSI = 15 cm (6") pop-up with no side inlet	
PROS-12 = 30 cm (12") pop-up	
PROS-12-NSI = 30 cm (12") pop-up with no side inlet	

EXAMPLES

PRO-04 - 10A	10 cm (4") pop-up, and 10A nozzle
PRO-06 - CV - 12H	15 cm (6") pop-up, drain check valve, and 12H nozzle
PRO-12 - CV-R - RCS	30 cm (12") pop-up, drain check valve, reclaimed body cap, and right corner strip

NOZZLES	PATTERN SELECT	KEY
2 = 61 cm (2') Radius	Q, H	A = Adjustable T = Third Circle Q = Quarter Circle H = Half Circle TT = Two Third Circle TQ = Three Quarter Circle F = Full Circle
4 = 1.2 m (4') Radius	A, Q, H	
5 = 1.5 m (5') Radius	Q, H, F	
6 = 1.8 m (6') Radius	A, Q, H	
8 = 2.4 m (8') Radius	A, Q, T, H, F	
10 = 3.0 m (10') Radius	A, Q, T, H, F	
12 = 3.7 m (12') Radius	A, Q, T, H, TT, TQ, F	
15 = 4.6 m (15') Radius	A, Q, T, H, TT, TQ, F	
17 = 5.2 m (17') Radius	A, Q, H	

12A

PRS30 MODELS (formerly Institutional Spray)	OPTIONS
PROS-00-PRS30 = 2.1 bar regulated shrub adapter	(blank) = No option CV = Factory-installed drain check valve (pop-up models only) CV-R = Factory-installed drain check valve and reclaimed body cap (shrub molded in purple) 15 cm and 30 cm models ordered as CV will come as no side inlet
PROS-04-PRS30 = 2.1 bar regulated 10 cm (4") pop-up	
PROS-06-PRS30 = 2.1 bar regulated 15 cm (6") pop-up	
PROS-06-NSI-PRS30 = 2.1 bar regulated 15 cm (6") pop-up with no side inlet	
PROS-12-PRS30 = 2.1 bar regulated 30 cm (12") pop-up	
PROS-12-NSI-PRS30 = 2.1 bar regulated 30 cm (12") pop-up with no side inlet	

EXAMPLES

PRO-04-PRS30	10 cm (4") pop-up regulated at 2.1 bar
PRO-06-PRS30 - CV - 12H	15 cm (6") pop-up regulated at 2.1 bar, drain check valve, and 12H nozzle
PRO-12-PRS30 - CV-R - 10A	30 cm (12") pop-up regulated at 2.1 bar, drain check valve, reclaimed body cap, and 10A nozzle

SPECIALTY NOZZLES
LCS = Left corner strip 1.5 m x 4.5 m (5' x 15')
RCS = Right corner strip 1.5 m x 4.5 m (5' x 15')
SS530 = Side strip 1.5 m x 9 m (5' x 30')
SS918 = Side strip 2.7 m x 5.5 m (9' x 18')
CS = Center strip 1.5 m x 9 m (5' x 30')
ES = End strip 1.5 m x 9 m (5' x 30')
5-8A = 2.4 m (8') Adjustable stream nozzle
5-16A = 4.9 m (16') Adjustable stream nozzle
5-CST-B = 1.5 m (5') Dual stream bubble nozzle

LCS

PRS40 MODELS (formerly MPR40)	OPTIONS
PROS-00-PRS40 = 2.8 bar regulated shrub adapter	(blank) = No option R = Factory-installed reclaimed body cap 15 cm and 30 cm models will come as no side inlet
PROS-04-PRS40-CV = 2.8 bar regulated 10 cm (4") pop-up	
PROS-06-PRS40-CV = 2.8 bar regulated 15 cm (6") pop-up	
PROS-12-PRS40-CV = 2.8 bar regulated 30 cm (12") pop-up	

EXAMPLES

PRO-04-PRS40	10 cm (4") pop-up regulated at 2.8 bar
PRO-06-PRS40-CV	15 cm (6") pop-up regulated at 2.8 bar, and drain check valve
PRO-12-PRS40-CV - R	30 cm (12") pop-up regulated at 2.8 bar, drain check valve, and reclaimed body cap

